

FACILITY CONDITION ASSESSMENT

Ann Richards School YWL | February 2022



Executive Summary

Ann Richards School YWL is located at 2309 Panther Trail in Austin, Texas. The oldest building is 62 years old (at time of 2020 assessment). It comprises 123,684 gross square feet.

The findings contained within this report are the result of an assessment of building systems and the conditions found on the site at the time of the visit. The assessment was performed by building professionals experienced in disciplines including architecture, mechanical, plumbing and electrical. The total current deficiencies for this site, in 2020 construction cost dollars, are estimated at \$0. A ten-year need was developed to provide an understanding of the current need as well as the projected needs in the near future. For Ann Richards School YWL the ten-year need is \$0.

For master planning purposes, the total current deficiencies and the first five years of projected life cycle needs were combined to calculate a Facility Condition Assessment (FCA) score. A 5-year FCA was calculated by dividing the 5-year need by the total replacement cost. Costs associated with new construction are not included in the FCA calculation. The Ann Richards School YWL facility has a 5-year FCA score of 100.00%.

Summary of Findings

The table below summarizes the condition findings at Ann Richards School YWL

Table 1: Facility Condition by Building

Number	Building Name	Current Deficiencies	5-Year Life Cycle Cost	Yrs 6-10 Life Cycle Cost	Total 5 Yr Need (Yr 1-5 + Current Defs)	Total 10 Yr Need (Yr 1-10 + Current Defs)	Replacement Cost	5-Year FCA
Exterior Si	te							
	Exterior Site	\$0	\$0	\$0	\$0	\$0	\$0	
Permanen	t Building(s)				-			
028A	Main building includes Administration Offices, Classrooms, Cafeteria, & Gym.	\$0	\$0	\$0	\$0	\$0	\$17,007,480	100.00%
028B	Mechanical Building (old Boiler House)	\$0	\$0	\$0	\$0	\$0	\$159,079	100.00%
028C	Stand-Alone Band Hall	\$0	\$0	\$0	\$0	\$0	\$495,516	100.00%
	Sub Total for Permanent Building(s):	\$0	\$0	\$0	\$0	\$0	\$17,662,075	
	Total for Site:	\$0	\$0	\$0	\$0	\$0	\$17,662,075	100.00%



Approach and Methodology

A facility condition assessment evaluates each building's overall condition. Two components of the facility condition assessment are combined to total the cost for facility need. The two components of the facility condition assessment are current deficiencies and life cycle forecast.

Current Deficiencies: Deficiencies are items in need of repair or replacement as a result of being broken, obsolete, or beyond useful life. The existing deficiencies that currently require correction are identified and assigned a priority. An example of a current deficiency might include a broken lighting fixture or an inoperable roof top air conditioning unit.

Life Cycle Forecast: Life cycle analysis evaluates the ages of a building's systems to forecast system replacement as they reach the end of serviceable life. An example of a life cycle system replacement is a roof with a 20-year life that has been in place for 15 years and may require replacement in five years.

All members of the survey team recorded existing conditions, identified problems and deficiencies, and documented corrective action and quantities. The team took digital photos at each site to better identify significant deficiencies.

Facility Deficiency Priority Levels

Deficiencies were ranked according to five priority levels, with Priority 1 items being the most critical to address:

Priority 1 – **Mission Critical Concerns:** Deficiencies or conditions that may directly affect the site's ability to remain open or deliver the educational curriculum. These deficiencies typically relate to building safety, code compliance, severely damaged or failing building components, and other items that require near-term correction. An example of a Priority 1 deficiency is a fire alarm system replacement.

Priority 2 - Indirect Impact to Educational Mission: Items that may progress to a Priority 1 item if not addressed in the near term. Examples of Priority 2 deficiencies include inadequate roofing that could cause deterioration of integral building systems, and conditions affecting building envelopes, such as roof and window replacements.

Priority 3 - Short-Term Conditions: Deficiencies that are necessary to the site's mission but may not require immediate attention. These items should be considered necessary improvements required to maximize facility efficiency and usefulness. Examples of Priority 3 items include site improvements and plumbing deficiencies.

Priority 4 - Long-Term Requirements: Items or systems that may be considered improvements to the instructional environment. The improvements may be aesthetic or provide greater functionality. Examples include cabinets, finishes, paving, removal of abandoned equipment, and educational accommodations associated with special programs.

Priority 5 - Enhancements: Deficiencies aesthetic in nature or considered enhancements. Typical deficiencies in this priority include repainting, replacing carpet, improved signage, or other improvements to the facility environment.




The following table summarizes this site's current deficiencies by building system and priority.

Table 2: System by Priority (Site & Permanent Buildings)

System	1	2	3	4	5	Total	% of Total
Site	\$0	\$0	\$0	\$0	\$0	\$0	0.00 %
Roofing	\$0	\$0	\$0	\$0	\$0	\$0	0.00 %
Structural	\$0	\$0	\$0	\$0	\$0	\$0	0.00 %
Exterior	\$0	\$0	\$0	\$0	\$0	\$0	0.00 %
Interior	\$0	\$0	\$0	\$0	\$0	\$0	0.00 %
Mechanical	\$0	\$0	\$0	\$0	\$0	\$0	0.00 %
Electrical	\$0	\$0	\$0	\$0	\$0	\$0	0.00 %
Plumbing	\$0	\$0	\$0	\$0	\$0	\$0	0.00 %
Fire and Life Safety	\$0	\$0	\$0	\$0	\$0	\$0	0.00 %
Conveyances	\$0	\$0	\$0	\$0	\$0	\$0	0.00 %
Specialties	\$0	\$0	\$0	\$0	\$0	\$0	0.00 %
Crawlspace	\$0	\$0	\$0	\$0	\$0	\$0	0.00 %
Total:	\$0	\$0	\$0	\$0	\$0	\$0	





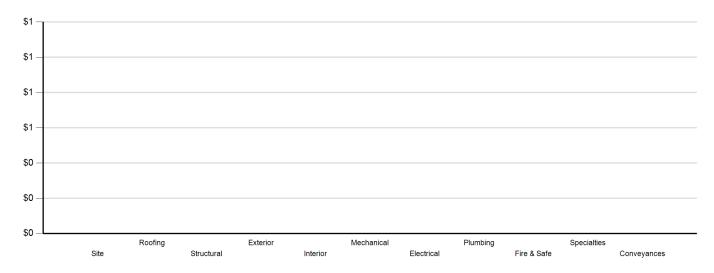


Figure 1: System Deficiencies



Life Cycle Capital Renewal Forecast

During the facility condition assessment, assessors inspected all major building systems. If an assessor identified a need for immediate replacement, a deficiency was created with the item's repair costs. The identified deficiency contributes to the facility's total current repair costs.

However, capital planning scenarios span multiple years, as opposed to being constrained to immediate repairs. Construction projects may begin several years after the initial facility condition assessment. Therefore, in addition to the current year repair costs, it is necessary to forecast the facility's future costs using a ten-year life cycle renewal forecast model.

Life cycle renewal is the projection of future building system costs based upon each individual system's expected serviceable life. Building systems and components age over time, eventually break down, reach the end of their useful lives, and may require replacement. While an item may be in good condition now, it might reach the end of its life before a planned construction project occurs.

The following tables show current deficiencies and the subsequent ten-year life cycle capital renewal projections. The projections outline costs for major building systems in which a component is expected to reach the end of its useful life and require capital funding for replacement.

	Life Cycle Capital Renewal Projections								
System	Year 1 2023	Year 2 2024	Year 3 2025	Year 4 2026	Year 5 2027	Total 1-5			
Site	\$0	\$0	\$0	\$0	\$0	\$0			
Roofing	\$0	\$0	\$0	\$0	\$0	\$0			
Exterior	\$0	\$0	\$0	\$0	\$0	\$0			
Interior	\$0	\$0	\$0	\$0	\$0	\$0			
Mechanical	\$0	\$0	\$0	\$0	\$0	\$0			
Electrical	\$0	\$0	\$0	\$0	\$0	\$0			
Plumbing	\$0	\$0	\$0	\$0	\$0	\$0			
Fire and Life Safety	\$0	\$0	\$0	\$0	\$0	\$0			
Conveyances	\$0	\$0	\$0	\$0	\$0	\$0			
Specialties	\$0	\$0	\$0	\$0	\$0	\$0			
Crawlspace	\$0	\$0	\$0	\$0	\$0	\$0			
Total	\$0	\$0	\$0	\$0	\$0	\$0			

Table 3a: Capital Renewal Forecast (Yrs 1-5)



Facility Condition Assessment

Austin ISD - Ann Richards School YWL

Table 3b: Capital Renewal Forecast (Yrs 6-10)

System	Total 1-5	Year 6 2028	Year 7 2029	Year 8 2030	Year 9 2031	Year 10 2032	Total 6-10	Total 1-10
Site	\$0	\$0	\$0	\$0	\$0	\$0	\$0	\$0
Roofing	\$0	\$0	\$0	\$0	\$0	\$0	\$0	\$0
Exterior	\$0	\$0	\$0	\$0	\$0	\$0	\$0	\$0
Interior	\$0	\$0	\$0	\$0	\$0	\$0	\$0	\$0
Mechanical	\$0	\$0	\$0	\$0	\$0	\$0	\$0	\$0
Electrical	\$0	\$0	\$0	\$0	\$0	\$0	\$0	\$0
Plumbing	\$0	\$0	\$0	\$0	\$0	\$0	\$0	\$0
Fire and Life Safety	\$0	\$0	\$0	\$0	\$0	\$0	\$0	\$0
Conveyances	\$0	\$0	\$0	\$0	\$0	\$0	\$0	\$0
Specialties	\$0	\$0	\$0	\$0	\$0	\$0	\$0	\$0
Crawlspace	\$0	\$0	\$0	\$0	\$0	\$0	\$0	\$0
Total	\$0	\$0	\$0	\$0	\$0	\$0	\$0	\$0

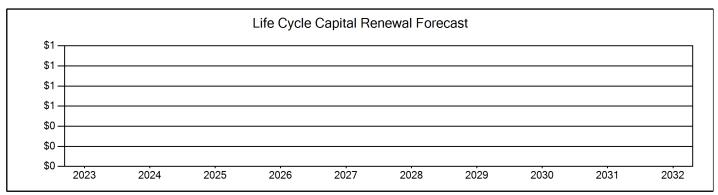


Figure 2: Ten Year Capital Renewal Forecast



Facility Condition Assessment Score

The Facility Condition Assessment Score (FCAS) is used throughout the facility condition assessment industry as a general indicator of a building's health. The FCAS is used to benchmark the relative condition of a group of sites. The FCAS is derived by dividing the total repair cost, site-related repairs, by the total replacement cost and subtracting it from 100. A facility with a lower FCAS percentage has more need, or higher priority, than a facility with a lower FCAS. It should be noted that costs in the New Construction category are not included in the FCAS calculation.


FCAS = 100 - (Total Repair Cost/ Replacement Cost)

For master planning purposes, the total current deficiencies and the first five years of projected life cycle needs were combined. This provides an understanding of the current needs of a facility as well as the projected needs in the near future. A 5-year FCAS was calculated by dividing the 5-year need by the total replacement cost. Costs associated with new construction are not included in the FCAS calculation.



Financial modeling has shown that over a 30-year period, it is more cost effective to replace than repair sites with a FCAS of 35 percent or greater. This is due to efficiency gains with facilities that are more modern and the value of the building at the end of the analysis period. It is important to note that the FCAS at which a facility should be considered for replacement is typically debated and adjusted based on property owners and facility managers approach to facility management. Of course, FCAS is not the only factor used to identify buildings that need renovation, replacement, or even closure. Historical significance, enrollment trends, community sentiment, and the availability of capital are additional factors that are analyzed when making campus facility decisions.

The replacement value represents the estimated cost of replacing the current building with another building of like size, based on today's estimated cost of construction in the Austin area. The estimated replacement cost for this facility is \$17,662,075. For planning purposes, the total 5-year need at the Ann Richards School YWL is \$0 (Life Cycle Years 1-5 plus the FCA deficiency cost). The Ann Richards School YWL facility has a 5-year FCA of 100.00%.





There are no deficiencies for this campus

Facility Condition Assessment

Austin ISD - Ann Richards School YWL

Buildings with no reported deficiencies

028A - Main building includes Administration Offices, Classrooms, Cafeteria, & Gym.

028B - Mechanical Building (old Boiler House)

028C - Stand-Alone Band Hall



There are no Life Cycle records for this campus

Supporting Photos